


LCM-150T-SB-USB-ICP-110815

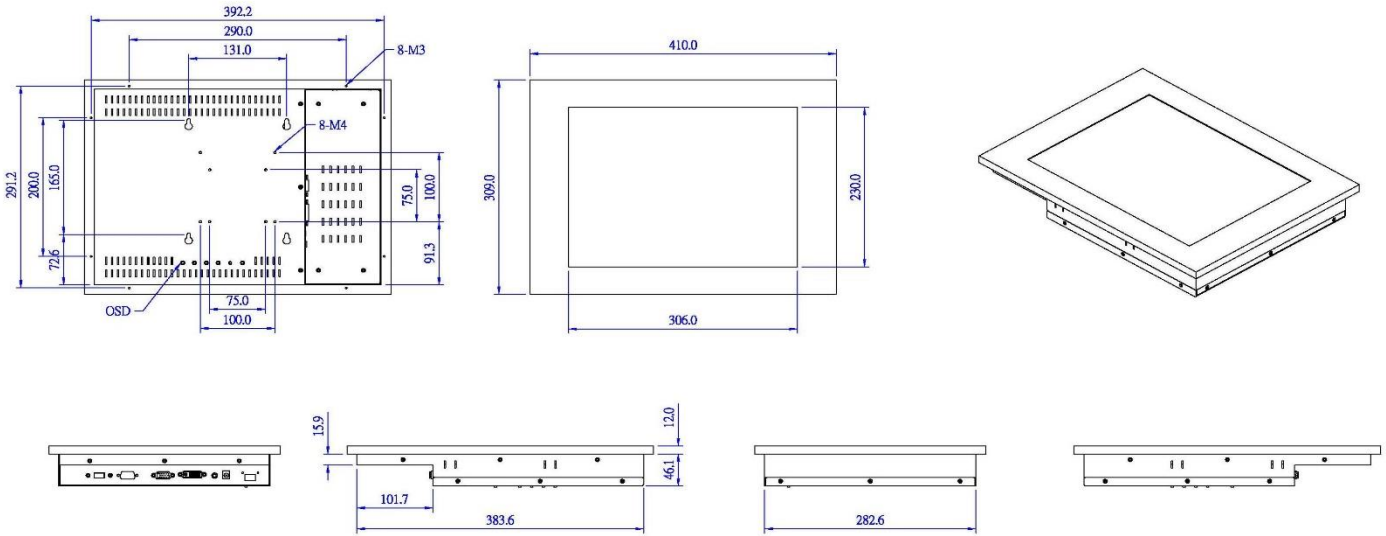

Specifications

LCD Display size

15.1" TFT LCD color display

LCD Resolution

1024 x 768 XGA resolution

Brightness of LCD (Luminance)

250 cd/m²

Optional : 450~550 cd/m² at extra cost

800~1000 cd/m² at extra cost

Contrast Ratio

300 : 1

Optional : 450 : 1

Wall-mount :

Meet industrial standard VESA-75/100

Touch-Screen : optional

5-Wire long life analog Resistive Touch screen, 4096 x 4096 high resolution

IP Rating

IP-65 and NEMA-4 water and dust resistant rating

Interface (VGA, DVI, BNC, Touch)

- a) Standard 15-pin female D-sub RGB connector,
- b) DVI interface
- c) BNC video port (optional)
- d) Touch interface : serial port or USB port (optional)

Anti-vibration and anti-shock design

- a) Meet industrial-military-grade anti-shock and anti-vibration standards.

Optional Temperature :

a) Industrial grade : 0 ~ 50 degrees C

b) Option : Military-grade : -20 ~ 70 degrees C

OSD Control buttons

On Screen Display buttons and On / Off power switch are located at the Rear side of the housing. These OSD buttons control screen position Up, Down, Left, Right, Brightness, Contrast ratio, menu.

Power Adapter

support 100 - 240V AC auto power range

Optional : DC 8~36V