




TECHNICAL SPECIFICATIONS

LCD Display	LCD	LCD Size : 15" TFT LCD diagonal
		Resolution : 1024 x 768 Brightness : 250 cd/m ² (Option : 800~1000 nits) Contrast Ratio : 700 : 1
Touch Screen	Touch	Built in 5-Wire Resistive Touch, 4096 x 4096
Chassis	Chassis material	Rugged steel construction coated with paint
	Color	Silver color
	Cooling Fan	1 x system cooling fan
Mounting	Mounting	Support VESA wall mount,
PC System	Main-Board	Military grade main board
	Chipset	Intel Q87 Express
	CPU No. :	Intel i3/i5/i7 (at your option)
	Processor (CPU)	Cache Memory : depending on CPU selected No. of Core : depending on CPU selected

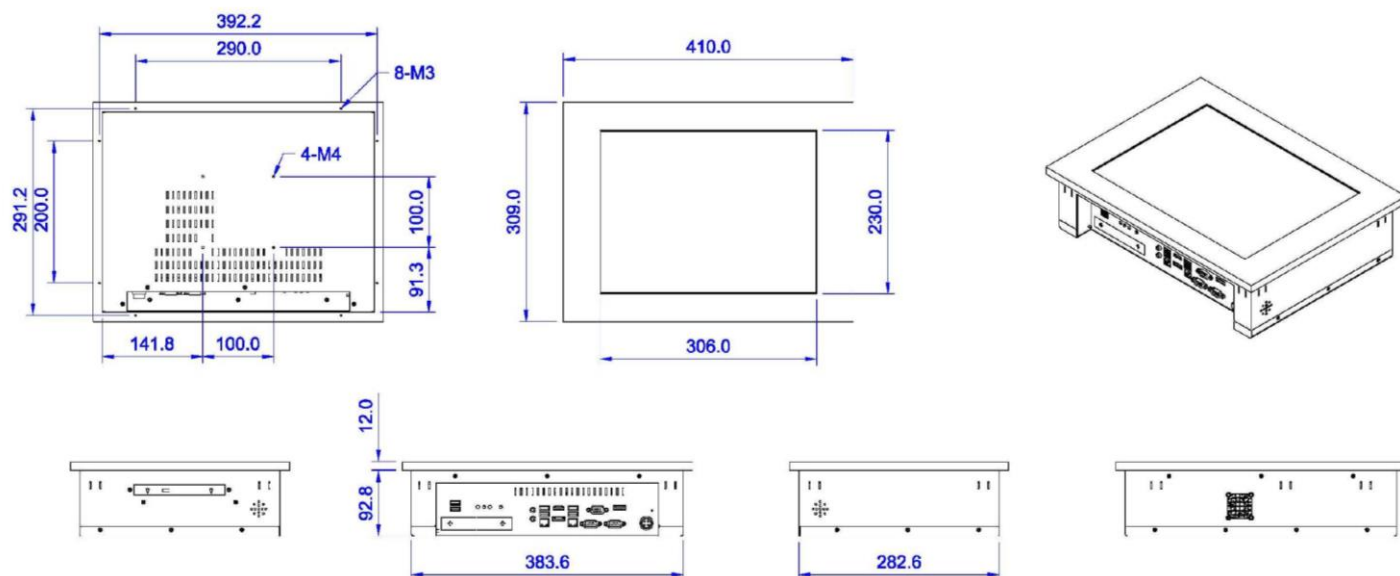

PPC-1587-ICP

		CPU Speed : depending on CPU selected
		CPU Power Consumption : 35W basically
	Memory	4GB DDR3 1600 MHz SO-DIMM memory Option : 8G, or 16GB(Max.)
Storage	HDD / SSD	500GB slim size HDD
I/O Port	USB Port	4 x USB 3.0 2 x USB 2.0
	Video Port	1 x VGA, 1 x HDMI 2 x Display Ports
	COM Port	3 x RS232/422/485 2 x RS232
	Ethernet Port	2 x Giga bit Ethernet ports support 10 / 100 / 1000 Mbps Network Teaming Function : supported
	Audio	1 x Mic-in, 1 x Line out
Expansion Slot	Mini PCI-e	1 x Mini PCIe slot
	Mini SATA	1 x Mini SATA slot
	PCIe Slot	Optional 1 x PCIe x16 slot
Power Consumption	Total Power Consumption	Around 50 Watts
Power Supply	AC Input	AC Power Input : 90-264V full range Power Capacity : 120 Watts
Environmental	Operating Temperature	0 ~ +60°C Option : -30°C with Nagasaki patented heater module
	Storage Temp>	-30 ~ +85°C
Dimension	Outside Dimension	See the above drawing
	Cut-Out Dimension	See the above drawing